



UROTECH[®]
A MEDI-GLOBE COMPANY



ACCESSORIES

Ureteral stents

nephrostomy

Suprapubic Bladder
drainage

Accessories

Ureteral Catheters

Foley catheters


Stone baskets

Special Products

ACCESSORIES

GUIDE WIRES

STANDARD GUIDE WIRE

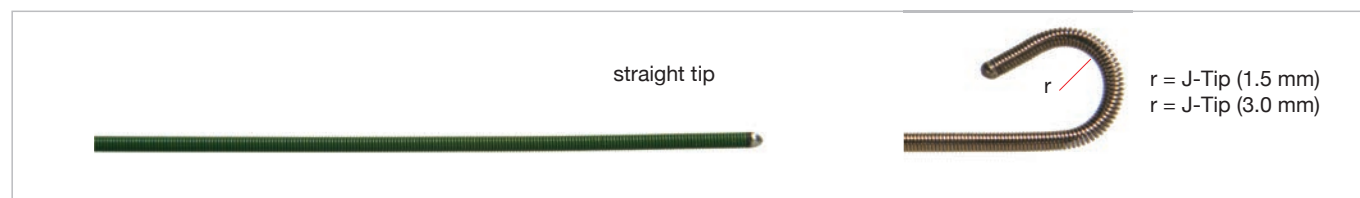

Standard – PTFE-coated stainless steel

Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
EN-340028	0.028"	100	straight	standard	standard
EN-340032	0.032"	100	straight	standard	standard
EN-340035	0.035"	100	straight	standard	standard
EN-340038	0.038"	100	straight	standard	standard
SU-120101	0.045"	100	straight	standard	standard
EN-340125	0.025"	125	straight	standard	standard
EN-340128	0.028"	125	straight	standard	standard
EN-340135	0.035"	125	straight	standard	standard
EN-340135-S	0.035"	125	straight	standard	stiff
EN-340228	0.028"	145	straight	standard	standard
EN-340150	0.035"	150	straight	standard	standard
EN-340035-J3	0.035"	100	J-tip (3.0 mm)	standard	standard

Lunderquist – PTFE-coated stainless steel

Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
RE-420170	0.025"	70	straight	standard	stiff
RE-420780	0.035"	80	J-tip (1.5 mm)	standard	stiff
RE-420380	0.035"	80	J-tip (3.0 mm)	standard	stiff
RE-420180	0.035"	80	straight	standard	stiff

With movable core – PTFE-coated stainless steel

Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
RE-420210	0.035"	125	straight	standard	standard
RE-420211	0.035"	150	straight	standard	standard

Schüller Guide wire – uncoated stainless steel

Order Codes	Diameter (inch)	Length (cm)	Tip 9 cm	Tip Stiffness	Shaft Stiffness
RE-430300	0.035"	100	J-tip (3.0 mm)	standard	stiff

ACCESSORIES

TIGER GUIDE WIRE



- Black-yellow swivelled, better control of wire movement
- Nitinol-core prevents kinking

- PTFE-coating supports easy and fast placement and ensures optimal gliding property for instruments

Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
UTD-35150	0.035"	150	straight	standard	standard
UTD-35150-A	0.035"	150	bent	standard	standard

SEMISLIP



- Suitable for all urological procedures
- 5 cm, very flexible and hydrophilic tip provides non-traumatic insertion and safe bypass of obstructions

- PTFE-coated shaft supports easy and fast placement and reduces the risk of dislocation during urological procedures

Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
UAS-35150-S	0.035"	150	straight	standard	standard

ACCESSORIES

UROLIX – HYDROPHILIC-COATED



Attention: To receive optimal results of the hydrophilic effect, please moisturise the Guide wire prior to use!


- 🔥 High flexibility and kink-resistance
- 🔥 Nitinol-core

Urolix					
Order Codes	Diameter (inch)	Length (cm)	Tip	Tip Stiffness	Shaft Stiffness
UXN-SS-2515	0,025"	150 cm	straight	standard	standard
UXN-SS-3215	0,032"	150 cm	straight	standard	standard
UXN-SS-3515	0,035"	150 cm	straight	standard	standard
UXN-SS-3815	0,038"	150 cm	straight	standard	standard
UXN-SF-2515	0,025"	150 cm	straight	floppy / 70 mm	standard
UXN-SF-3215	0,032"	150 cm	straight	floppy / 70 mm	standard
UXN-SF-3515	0,035"	150 cm	straight	floppy / 70 mm	standard
UXN-SF-3815	0,038"	150 cm	straight	floppy / 70 mm	standard
UXS-SS-2515	0,025"	150 cm	straight	standard	stiff
UXS-SS-3215	0,032"	150 cm	straight	standard	stiff
UXS-SS-3515	0,035"	150 cm	straight	standard	stiff
UXS-SS-3815	0,038"	150 cm	straight	standard	stiff
UXN-CS-3515	0,035"	150 cm	angled	standard	standard
UXN-CS-3815	0,038"	150 cm	angled	standard	standard
UXS-CS-3515	0,035"	150 cm	angled	standard	stiff

ACCESSORIES

PLATINPUSHER Pusher with radiopaque marker

DESCRIPTION

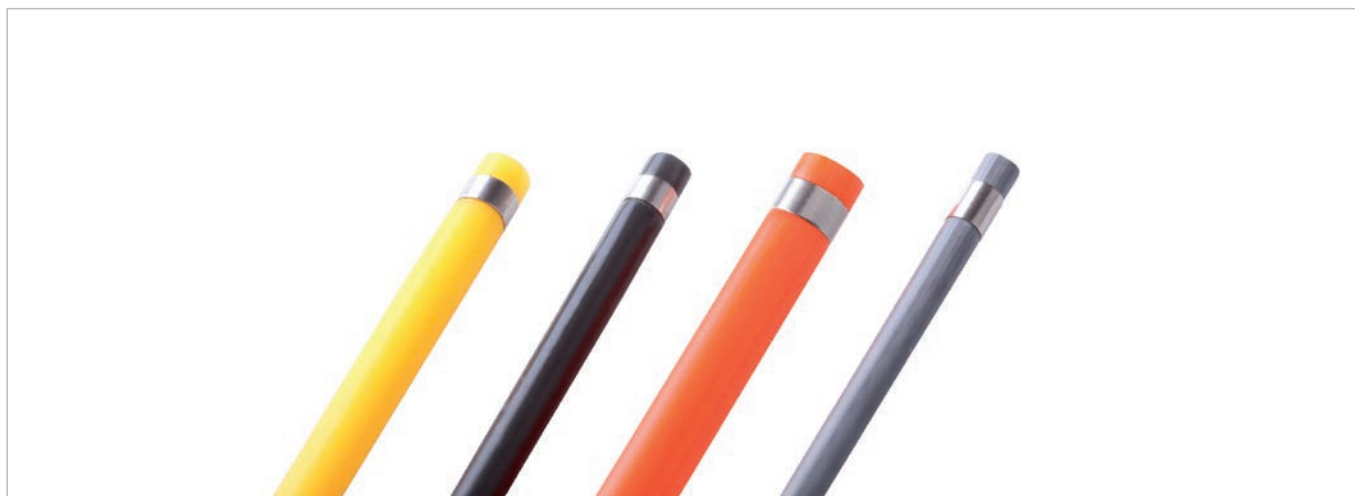

Pusher

- ◆ Marker indicates precise location of the pusher
- ◆ Supports correct stent positioning
- ◆ Special length for endoscopic working channel

Size (FR/CH)	Length (cm)	Order Code	Max. Guide wire Diameter
05	45	PU-0545-RM	0.028"
05	70	PU-0570-RM	0.028"
06	45	PU-0645-RM	0.035"
06	70	PU-0670-RM	0.035"
07	45	PU-0745-RM	0.035"
08	45	PU-0845-RM	0.038"